

Barrier.Gate 'Single Color Boom'

Make an impression!

The access point is the first contact of your customers with your car park.
Make the barrier boom shine.
Because it's the first impression that counts...

The signature of your company

- Be seen, be different: these optically striking access points will help to establish YOUR image among customers and competitors
- Personalize your car park:
You decide in what color you want the barrier boom to represent your company

Save money

- Profit from extremely low maintenance costs
No more time-consuming maintenance tasks for halogen lamps
- Go for LED and make better use of your time


Ideally suited for outside use

- In yellow, or in the color of your choice
- For snow, rain, darkness and sunshine
- The evenly applied paint makes sure the boom catches the eye under all conditions of light

Make a visual impact

- The Single Color Boom can be attached to almost any barrier; no hardware update required
- So why wait till tomorrow?

all dimensions in mm

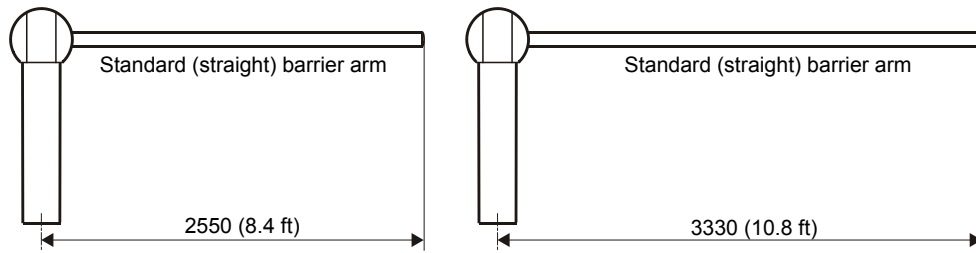

Properties

- Evenly illuminated by a white LED ribbon
- Fully mounting compatible to "AS 450 ASL"
- Electronic components (including barrier breakage sensor) fully compatible
- Can be shortened (by a technician) at 21 cm (8.268") intervals
- Temperature-resistant and vibration-resistant
- Weatherproof and dampproof

Available in two lengths (mind the operation mode):

- Standard operation mode: max. 2,55 m (8.4 ft)
- Extended operation mode: max. 3,33 m (10.8 ft)

Standard Version

- Yellow barrier boom with holding frame
- Protective black rubber bead at the bottom of the boom profile
- Available boom holding frames: Detachable / Fixed / Fixed-GB
- Power supply board inside the barrier boom holding frame
- Highly integrated white POWER LED ribbon

Options

- Customer-specific barrier boom holding frame: RAL
- Customer-specific color: Barrier boom profile: for quantities of 50 or 200 pieces respectively (color sample required)

Technical Specifications

Dimensions	2,55 m (8.4 ft) or 3,33 m (10.8 ft) (length of barrier boom, including end cap)
Weight	3,15 kg / 6.9 lbs (2,55 m) or 4,10 kg / 9.0 lbs (3,33 m) (without aluminium holder)
Max. power consumption	20 W / +12 V DC (protected by a micro-fuse)
Temperature range	-35 °C to +55 °C (-31 °F to +131 °F) / max.. 90 % relative humidity(non-condensing)
Color	Barrier boom holding frame – RAL 9007 Gray Aluminium Semi-Gloss Barrier boom profile - yellow - pantone 114 U (fibre-glass reinforced plastic)